

WINDOW AND STOREFRONT SCHEDULE - FIRST FLOOR

No.	LOCATION (ROOM NUMBER & NAME)	WINDOW						FRAME (DTLS. ON SHEET A10.81, U.O.N.)					REMARKS
		TYPE	WALL OPENING	WxH	RATING (MINUTES)	MAT'L	FUNCTION	GLASS	FINISH	HEAD	JAMB	SILL	
6101	6-112 (E) CLASSROOM	SF2	9'-0"x 11'-7"	—	AL	FIXED	—	—	AA	12	13	14	
6102	6-112 (E) CLASSROOM	SF2	9'-0"x 11'-7"	—	AL	FIXED	—	—	AA	12	13	14	
6103	6-102 MULTI-PURPOSE RM.	SF2	9'-0"x 11'-7"	—	AL	FIXED	—	—	AA	12	13	14	
6104	6-102 MULTI-PURPOSE RM.	SF4	9'-0"x 11'-7"	—	AL	FIXED	—	—	AA	12	13	14	
6105	6-102 MULTI-PURPOSE RM.	SF2	9'-0"x 11'-7"	—	AL	FIXED	—	—	AA	12	13	14	
6106	6-103 MEETING ROOM	SF3	9'-0"x 11'-7"	—	AL	FIXED	—	—	AA	12	13	14	
6107	6-103 MEETING ROOM	SF2	9'-0"x 11'-7"	—	AL	FIXED	—	—	AA	12	13	14	
6108	6-101 LOBBY	SF4	9'-0"x 11'-7"	—	AL	FIXED	—	—	AA	12	13	14	
5109	5-112 MEETING ROOM	W2	7'-4"x 3'-4"	60	STL	FIXED	—	—	P-5	17	17	17	

WINDOW AND STOREFRONT SCHEDULE - SECOND FLOOR

No.	LOCATION (ROOM NUMBER & NAME)	WINDOW						FRAME (DTLS. ON SHEET A10.81, U.O.N.)					REMARKS
		TYPE	WALL OPENING	WxH	RATING (MINUTES)	MAT'L	FUNCTION	GLASS	FINISH	HEAD	JAMB	SILL	
5201	5-232 DIRECTOR	W5	3'-0"x 3'-6"	60	STL	FIXED	—	—	P-5	17	17	17	
5202	5-230 RECEPTION	W1	3'-0"x 3'-4"	—	AL	SLIDING	—	—	P-5	21	22	23	
5203	5-220 MAIL ROOM	W5	3'-0"x 3'-6"	60	STL	FIXED	—	—	P-5	17	17	17	
5204	5-220 MAIL ROOM	W5	3'-0"x 3'-6"	60	STL	FIXED	—	—	P-5	17	17	17	

WINDOW AND STOREFRONT SCHEDULE - THIRD FLOOR

No.	LOCATION (ROOM NUMBER & NAME)	WINDOW						FRAME (DTLS. ON SHEET A10.81, U.O.N.)					REMARKS
		TYPE	WALL OPENING	WxH	RATING (MINUTES)	MAT'L	FUNCTION	GLASS	FINISH	HEAD	JAMB	SILL	
5301	5-301E LOBBY	SF1	10'-0"x 9'-0"	60	STL	FIXED	—	—	AA	17	17	17	
5302	5-301E LOBBY	F4	10'-0"x 9'-0"	60	STL	FIXED	—	—	AA	17	17	17	
5303	5-301E LOBBY	SF1	10'-0"x 9'-0"	60	STL	FIXED	—	—	AA	17	17	17	
5304	NOT USED			—	—	—	—	—	—	—	—	—	
5305	5-350 LARGE MTG. RM.	W2	7'-4"x 3'-4"	60	STL	FIXED	—	—	P-5	17	17	17	
5306	5-350 LARGE MTG. RM.	W3	3'-10"x 3'-4"	60	STL	FIXED	—	—	P-5	17	17	17	
5308	5-304 TESTING RM.	W4	8'-8"x 5'-4"	60	STL	FIXED	—	—	P-5	17	17	17	

WINDOW LEGEND:


AA	ANODIZED ALUMINUM	P-5	SEMI-GLOSS PAINT FINISH
AL	ALUMINUM		(SEE FINISH LEGEND BELOW)
HM	HOLLOW METAL	ST	STAIN (VERIFY FINISH W/ARCHITECT)
NR	NON RATED	STL	STEEL

FINISH GROUPS


KEY	TYPICAL ROOM	FLOOR	BASE	WALLS	WAINSCOT	CEILING	REMARKS
A	OFFICES	CARPET	RUBBER	GYP. BOARD W/ P-1 CONC. COLUMNS W/P-3; P-4 GYP. BD. WALL ACCENT W/P-3	—	SUSPENDED ACOUSTICAL PANEL	4
B	MEETING ROOMS	CARPET	RUBBER	GYP. BOARD W/ P-1 CONC. COLUMNS W/P-3	VINYL	SUSPENDED ACOUSTICAL PANEL	2, 4
C	MULTI-PURPOSE/HALLWAY ASSEMBLY/LOBBIES/ RECEPT./WAITING/CAFETERIA	RESILIENT FLOORING 1	RUBBER	GYP. BOARD W/ P-1 CONC. COLUMNS W/P-2; P-3	VINYL	SUSPENDED ACOUSTICAL PANEL	4
D	CLASSROOMS/ SEMINAR ROOMS	RESILIENT FLOORING 1	RUBBER	GYP. BOARD W/ P-1 CONC. COLUMNS W/P-2; P-3	VINYL	SUSPENDED ACOUSTICAL PANEL	4
E1	RESTROOMS	CERAMIC TILE (BLEND OF ALL FIELD/BORDER COLORS)	CERAMIC TILE COVE	GYP. BOARD W/ P-1	CERAMIC TILE TO +7'-6"	GYP. BOARD W/P-1	—
E2	RESTROOMS/ EXAM ROOM	RESILIENT FLOORING 2	CERAMIC TILE COVE	GYP. BOARD W/ P-1	CERAMIC TILE TO +7'-6"	GYP. BOARD W/P-1	—
F	CENTRAL DUPLICATING/ MAIL ROOMS/ WORK SPACES	RESILIENT FLOORING 1	RUBBER	GYP. BOARD W/ P-1 CONC. COLUMNS W/P-4; P-5	VINYL	SUSPENDED ACOUSTICAL PANEL	4
G	BREAK ROOMS/ TESTING RM/ THERAPY ROOMS	RESILIENT FLOORING 1	RUBBER	GYP. BOARD W/ P-1 GYP. BD. WALL ACCENT W/P-2	VINYL	SUSPENDED ACOUSTICAL PANEL (WHERE SHOWN: GYP. BOARD W/P-12)	4
H	TEL/DATA ELECTRICAL/MECHANICAL	SEALED CONCRETE	N/A	GYP. BOARD W/ LEVEL 1 FINISH (NO PAINT)	—	EXPOSED	—
J	KITCHEN/SERVERY/FOOD STOR./REFR./FREEZER/ GARBAGE/ELEC.	—	—	—	—	—	—
K	ELEVATOR	RESILIENT FLOORING 1	N/A	#4 SATIN STAINLESS STEEL	—	#4 STAINLESS STEEL FRAME W/ WHITE ACRYLIC LIGHT DIFFUSERS	—
—	EXISTING FINISHES TO REMAIN, UNLESS NOTED OTHERWISE						

REMARKS:


- ACOUSTIC WALL PANELS TO BE LOCATED AT VERTICAL FACE OF EXPOSED ROOF STRUCTURE ABOVE (SEE BUILDING SECTIONS AND WALL SECTIONS), AND DTLS 6&7/A10.61.
- ACOUSTIC WALL PANELS MOUNTED ABOVE CHAIR RAIL (SEE INTERIOR ELEVATIONS).
- ACOUSTIC CEILING PANELS SHALL HAVE A MIN. NRC RATING OF 0.95.
- PROVIDE VAPOR-ALKALINITY CONTROL BARRIER TO (E) CONCRETE SLAB SUBSTRATE PRIOR TO INSTALLATION OF FINISH FLOORING
- ACCENT WALL IN OFFICES AT DOOR WALL (SEE INTERIOR ELEVATIONS)

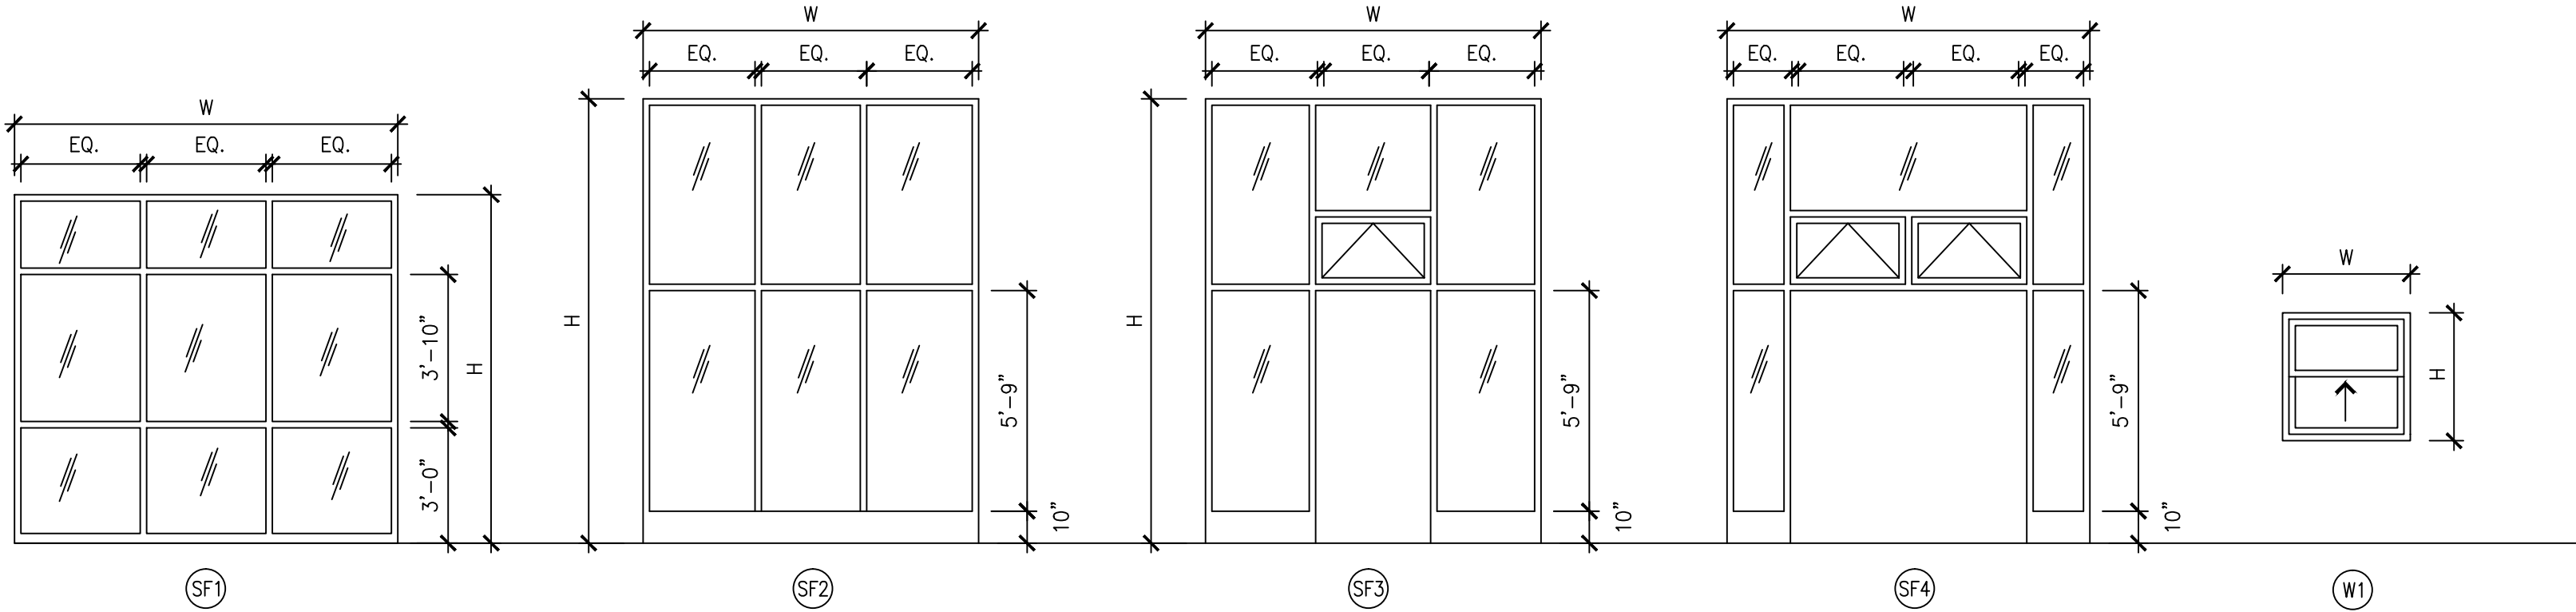


STOREFRONT + WINDOW TYPES

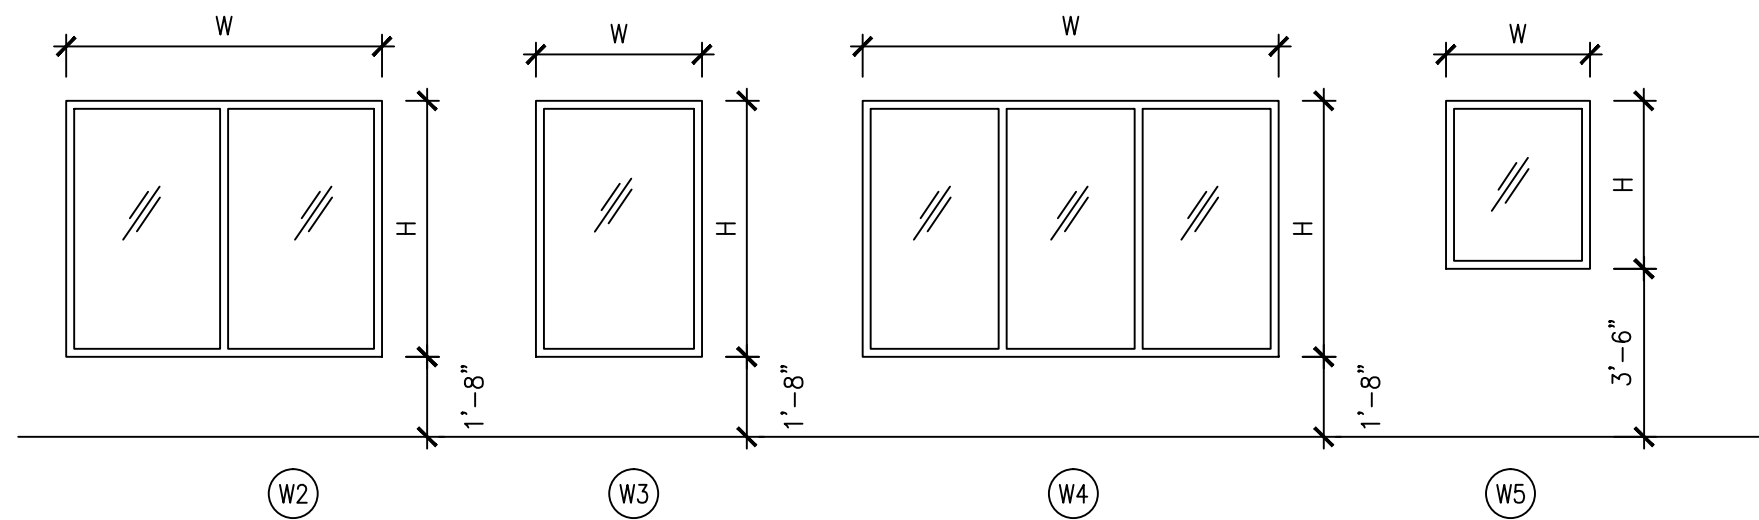

STOREFRONT + WINDOW TYPES (CONT.)

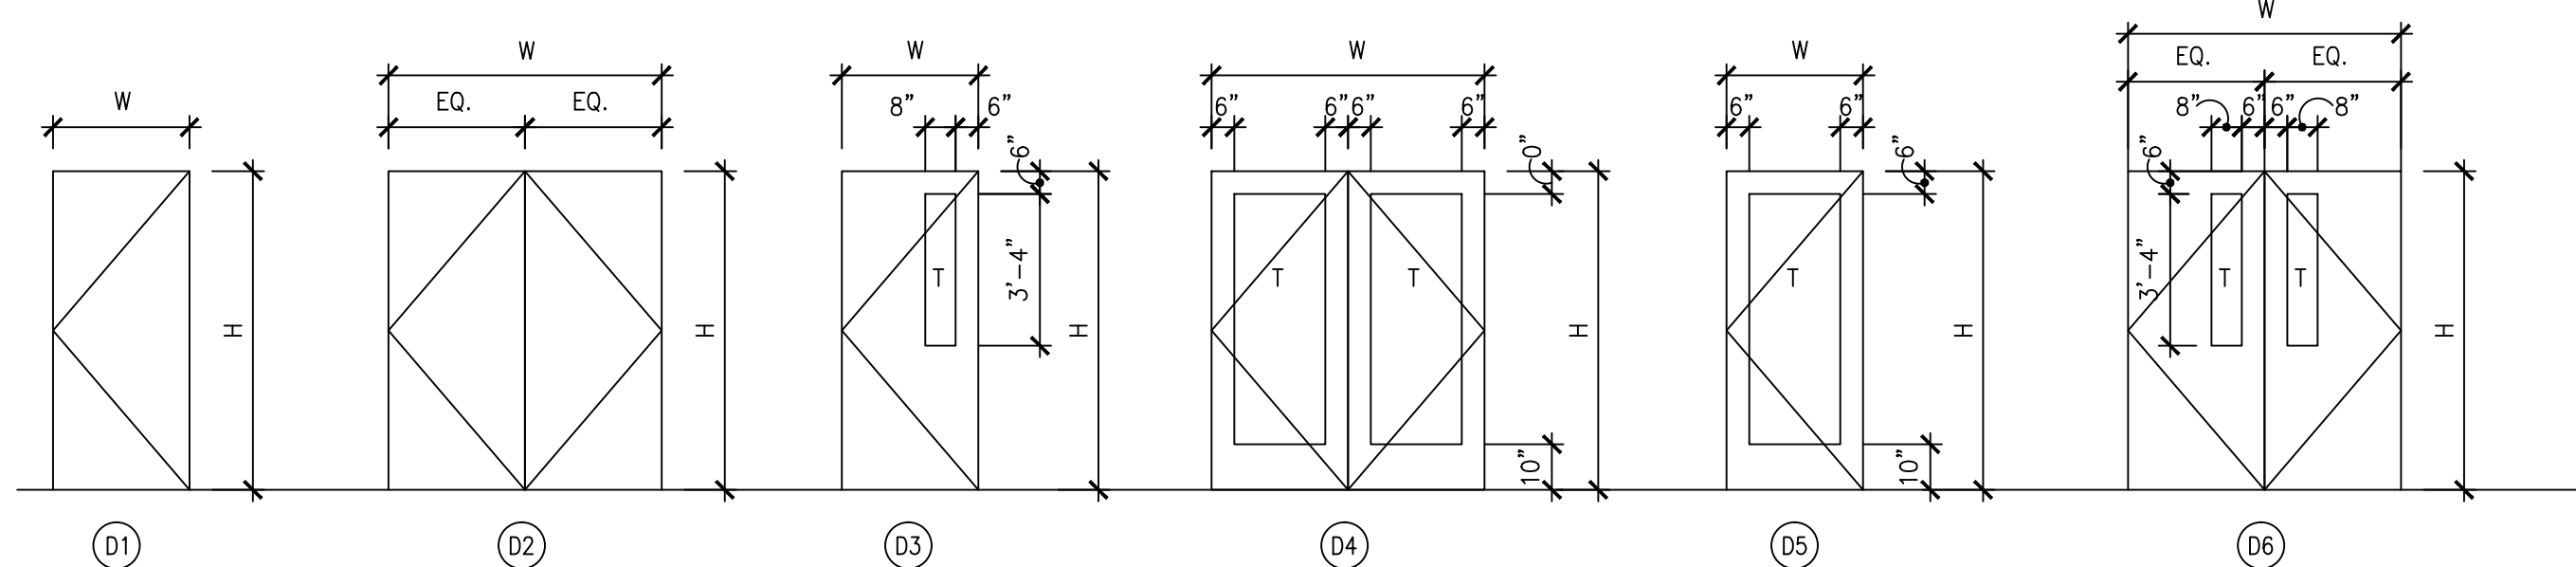


DOOR TYPES

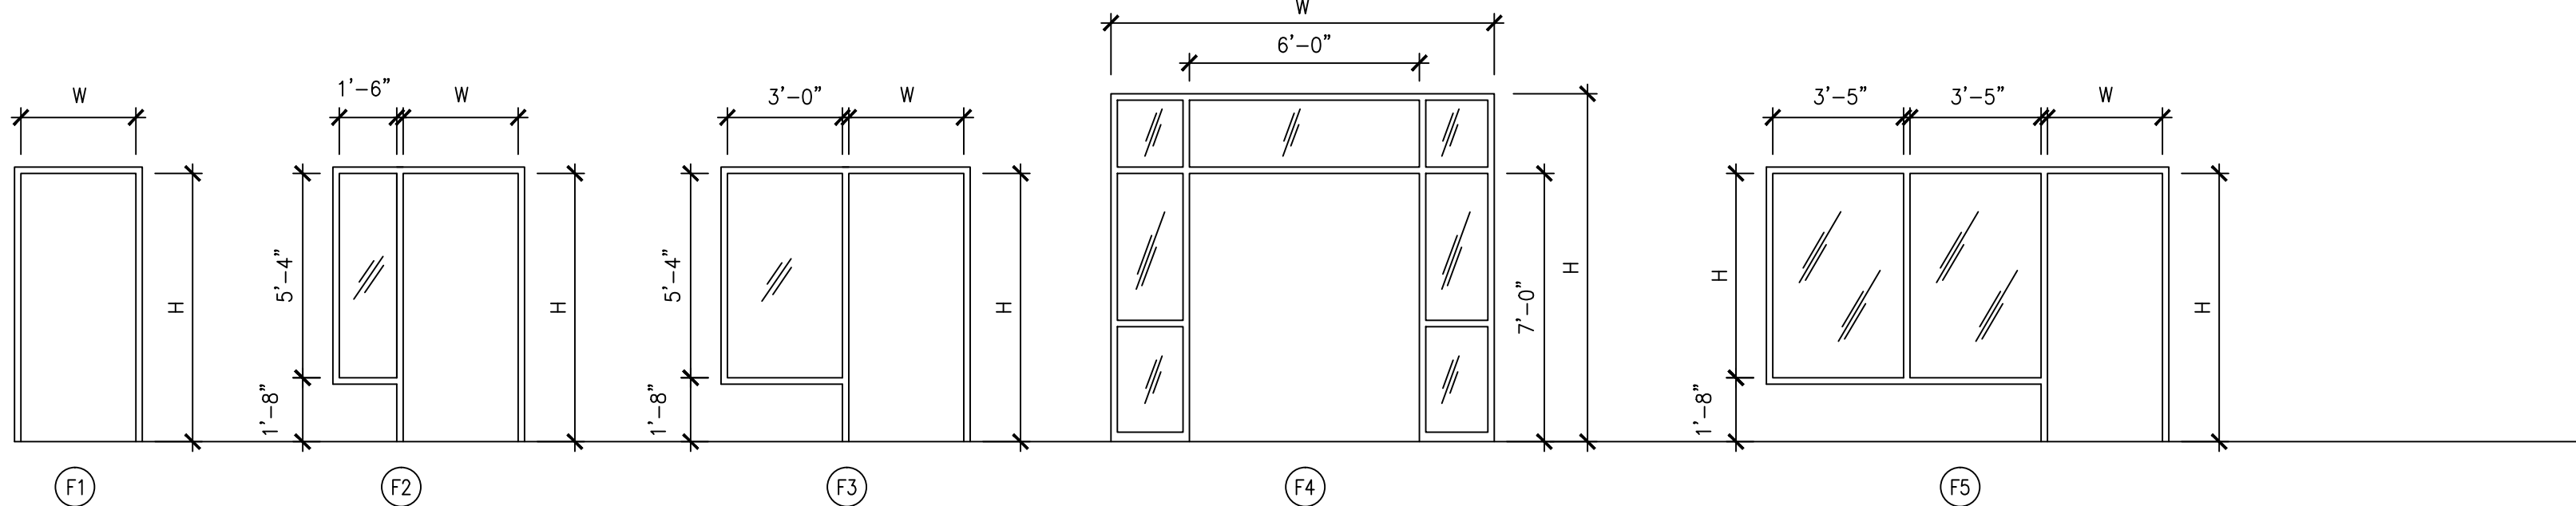

FRAME TYPES

FINISH LEGEND

FLOOR	CARPET: COLLINS & AIKMAN, STYLE: "ODYSSEY"	COLOR: 14520 "GANYMEDE"
	RESILIENT FLOORING 1: VINYL COMPOSITION TILE	COLOR: VENETO 6603 "SAND DOLLAR"
	RESILIENT FLOORING 2: ALTRO MAXIS SUPREMA	COLOR: SU2009 "MINERVA"
	CERAMIC TILE: DALTILE	COLORS: FIELD A - D138 "GOLD DUST"
		FIELD B - D050 "MOTTLED MEDIUM BROWN"
		FIELD C - D156 "BROWNSTONE RANGE"
		FIELD D - D311 "EBONY"
		BORDER E - D311 "EBONY"
BASE	RUBBER: BURKE RUBBER BASE	COLOR: 523 "BLACK BROWN"
	CERAMIC TILE COVE: DALTILE	COLOR: D311 "EBONY"
WALLS	P-1: EGGSHELL INTERIOR LATEX PAINT	COLOR: FIELD - KELLY-MOORE OW-27 "BONE"
	P-2: EGGSHELL INTERIOR LATEX PAINT	COLOR: ACCENT #1 - KELLY-MOORE 06-435-SMT "PUTTY"
	P-3: EGGSHELL INTERIOR LATEX PAINT	COLOR: ACCENT #2 - KELLY-MOORE 06-437-SMT "INDIAN CORN"
	P-4: EGGSHELL INTERIOR LATEX PAINT	COLOR: ACCENT #3 - KELLY-MOORE 06-439-SMT "KHAKI GREEN"
	P-5: EGGSHELL INTERIOR LATEX PAINT	COLOR: DOOR/WINDOW TRIM - KELLY-MOORE RUSTOLEUM "BRONZETONE"
	P-6: SEMI-GLOSS INTERIOR LATEX PAINT	COLOR: KELLY-MOORE OW-27 "BONE"
WAINSCOT	CERAMIC TILE: DALTILE	FIELD, BULLNOSE AND LINER COLORS: 190 "ARCTIC WHITE"
	VINYL: INPRO SANPARREL RIGID VINYL SHEET	COLOR: "CLAM SHELL"
CEILING	SUSPENDED ACOUSTICAL PANEL:	COLOR: USG MILLENIA CLIMAPLUS ILLUSION TWO/24 PANELS - WHITE
	GYP. BOARD P-11	COLOR: KELLY-MOORE OW-27 "BONE"
	GYP. BOARD P-12	COLOR: KELLY-MOORE 06-435-SMT "PUTTY"

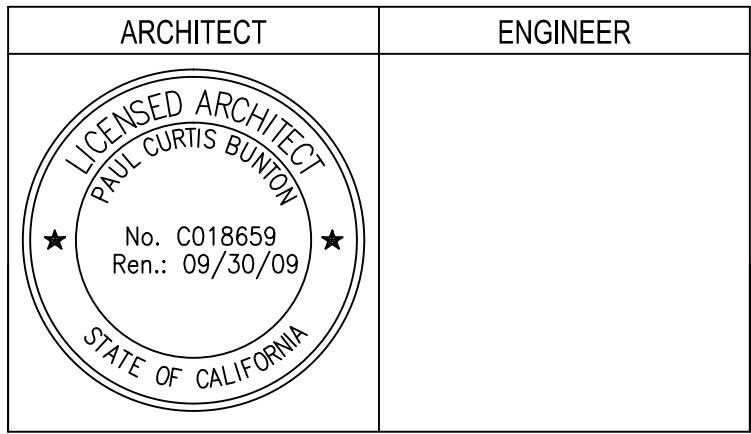

- GENERAL NOTES
- This sheet is part of a set and is not to be used alone.
 - This sheet is not to be used for construction unless the architect's stamp and signature appear on the drawings and the status box indicates drawings have been released for construction.
 - These plans and prints thereof, as instruments of service, are owned by the architect and are for use on this project only. Reproduction and/or distribution without the prior written consent of the architect is forbidden.
 - Copyright Bunton Clifford Associates, 2007

REMARKS	DATE
△	
△	
△	
△	
△	
△	
△	
△	
△	

DRAWING STATUS	DATE
<input type="radio"/> DSA PLAN CHECK	
<input type="radio"/> DSA BACK CHECK	
<input type="radio"/> BIDDING (BID #66565)	
<input type="radio"/> CONSTRUCTION	

FILE NO. ##-##

IDENTIFICATION STAMP
DIV. OF THE STATE ARCHITECT

##- #####

AC. FLS. SS

DATE

BUILDINGS 5 & 6
RENOVATIONS

San Mateo County Community
College District

DSA SUBMITTAL

CAÑADA COLLEGE
4200 Farm Hill Boulevard
Redwood City, CA 94061

FINISH, WINDOW
SCHEDULES

Date
08/29/08

Scale
AS NOTED

Project Number
07013

Drawing Number

A9.1